



Red and white reflective panels.	Model	Height (mm)	Delivery weight (kg/ea.)	Reference	Typical delivery time (working days)
	100-VM	1,097 O/all (997mm above ground)	1.1	168.26.477	5 / 10 days


TRAFFIC-LINE Height Restrictor Bar – Plastic



Red/white reflective bands. Chain attachments each end.	Colour	Dimension (mm) B/Ø	Delivery weight (kg/ea.)	Reference	Typical delivery time (working days)
	red / white	950 / 100	2.7	302.24.997	3 / 5 days

TRAFFIC-LINE Height Restrictor Bar – Aluminium



Reflective, 150 x 20mm Chain suspended.	Colour	Dimensions (mm)	Delivery weight (kg/ea.)	Reference	Typical delivery time (working days)
	red / white	2,000	6	302.15.082	10 / 15 days
		2,500	7	302.16.975	
		3,000	11	302.18.457	
		4,000	13	302.13.245	
		5,000	15	302.15.125	
	black / yellow	2,000	6	302.16.017	
		2,500	7	302.16.495	
		3,000	11	302.17.584	
		4,000	13	302.13.360	
		5,000	15	302.19.951	

COMPACT Boom Barrier - Gas damper assisted action

Barrier with cylinder lock	Overall width (mm)	Max. drive through width (mm)	Delivery weight (kg/ea.)	Reference	Typical delivery time (working days)
	2,500	1,720	45	224.29.696	20 / 25 days
	3,000	2,220	50	224.22.401	
	3,500	2,720	55	224.20.095	
	4,000	3,220	60	224.28.826	
	4,500	3,720	65	224.29.890	
Accessories				Reference	
Replacement triangular key				130.19.874	20 / 25 days
Pivot post for sub-surface option					
Triangular key option replacing cylinder locks					


With integrated support arm Surface fix pivot post	Overall width (mm)	Max. drive through width (mm)	Delivery weight (kg/ea.)	Reference	Typical delivery time (working days)
	3,320	2,900	60	222.24.949	20 / 25 days
	3,820	3,400	70	222.25.156	
	4,320	3,900	80	222.22.549	
	4,820	4,400	90	222.27.060	
	5,320	4,900	100	222.22.516	
	5,820	5,400	110	222.26.548	
	6,320	5,900	120	222.24.380	
With fixed support post Surface fix pivot post	Overall width (mm)	Max. drive through width (mm)	Delivery weight (kg/ea.)	Reference	Typical delivery time (working days)
	3,320	2,900	75	222.29.410	20 / 25 days
	3,820	3,400	85	222.28.372	
	4,320	3,900	95	222.25.184	
	4,820	4,400	105	222.23.852	
	5,320	4,900	115	222.27.798	
	5,820	5,400	125	222.20.858	
	6,320	5,900	135	222.29.758	
Accessories				Reference	
Pivot post for sub-surface fix (use with pendulum support)				222.22.548	20 / 25 days
Pivot and support post for sub-surface fix (for use with separate support post)				222.26.318	
Triangular key operated lock				222.24.919	
Replacement triangular key				130.19.874	

COMPACT System Boom Barrier - Counterweight style

With integrated support arm Surface fix pivot post. Cylinder lock	Overall width (mm)	Max. drive through width (mm)	Delivery weight (kg/ea.)	Reference	Typical delivery time (working days)
	3,000	1,895	75	226.24.283	20 / 25 days
	3,500	2,395	85	226.23.453	
	4,000	2,895	95	226.20.211	
	4,500	3,395	105	226.23.358	
	5,000	3,895	115	226.26.559	
	5,500	4,395	125	226.20.445	
	6,000	4,895	135	226.26.388	
With fixed support post Surface fix pivot post. Cylinder lock	Overall width (mm)	Max. drive through width (mm)	Delivery weight (kg/ea.)	Reference	Typical delivery time (working days)
	4,000	2,895	110	226.29.274	20 / 25 days
	4,500	3,395	125	226.25.650	
	5,000	3,895	135	226.29.856	
	5,500	4,395	145	226.27.529	
	6,000	4,895	155	226.25.934	
	6,500	5,395	165	226.24.133	
	7,000	5,895	175	226.28.401	
Accessories				Reference	
Replacement triangular key				130.19.874	20 / 25 days
Sub-surface fix option for Barrier with integrated support					
Sub-surface fix option - Pivot and support post version					
Triangular key option replacing cylinder locks					

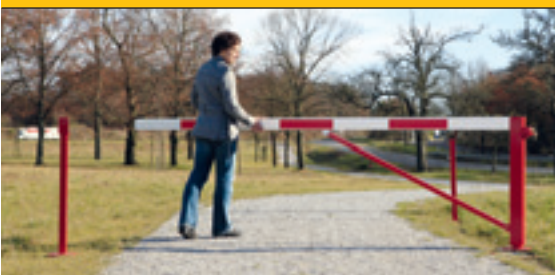
COMPACT Electronic Boom Barrier

Product description page 109

Includes 1 x remote control unit and 1 6v Battery	Overall width (mm)	Max. drive through width (mm)	Delivery weight (kg/ea.)	Reference	Typical delivery time (working days)
	1,350	1,200	18	223.26.830	20 / 25 days
	1,650	1,500	18,5	223.21.698	
	2,150	2,000	19,5	223.24.144	
	2,650	2,500	20,5	223.29.795	
Accessories				Reference	
Additional remote control units				223.20.969	20 / 25 days
Additional 6v Battery				223.23.724	
Charger				223.26.644	


COMPACT Swing Barrier

Product description page 110

Includes two support posts and cylinder lock	Overall width (mm)	Max. drive through width (mm)	Delivery weight (kg/ea.)	Reference	Typical delivery time (working days)
	2,500	2,205	55	225.24.432	20 / 25 days
	3,000	2,705	60	225.24.693	
	3,500	3,205	65	225.29.755	
	4,000	3,705	70	225.29.724	
	4,500	4,205	75	225.28.929	
Accessories				Reference	
Replacement triangular key				130.19.874	20 / 25 days
Sub-surface fix option					
Triangular key locking operation replacing cylinder locks					

COMPACT Barrier Gates

Product description page 111

Swing gates with Cylinder locks; (Barrier = 2 Gates)	Each gate dim. (mm)	Max. drive through width (mm)	Delivery weight (kg/ea.)	Reference	Typical delivery time (working days)
	1,250	1,050	75	221.29.973	20 / 25 days
	1,750	1,550	90	221.22.813	
	2,250	2,050	105	221.27.418	
	2,750	2,550	120	221.21.467	
	3,250	3,050	135	221.25.404	
Accessories				Reference	
Replacement triangular key				130.19.874	20 / 25 days
Pivot post for sub-surface option (per set)					
Triangular key option replacing cylinder locks					